CRISP MAX

SPECIFICATIONS / TECHNICAL DATA
REV A

DYNAMIC EFFECTS:
Snow Adjustment: 0-100%
Fan Speed Adjustment: 50% or 100%
Auto-Cleaning Feature

CONTROL:
2 Card Inputs for optional cards
RDM (Remote Device Management)
Control Protocol: DMX512
DMX Modes: 3 (1, 3 & 5 Channel)
On-Board Timing Control
5 Factory Presets
4-pin Wired Remote Input
Touch Screen Display
Manual Trigger via Touch Display

CONNECTIONS:
Data Connector: 5-pin XLR In / Out for DMX connections, 4-pin XLR for optional wired remote.
Locking Power Connector

CONSTRUCTION / PHYSICAL / PERFORMANCE
Dimensions: (LxWxH) 21.3 x 21.1 x 24.5in / 540 x 535 x 623.5mm
Weight: 77.17lbs / 35kg
Fluid Tank Capacity: 20L
Fluid Consumption: 16.9 fl. oz/min (500ml/min)

ELECTRICAL:
Power Consumption: 1250w
Input Voltage: 120V, 230V, 240V, 50 & 60Hz
Breaker Size: 15A (120V Version)
Breaker Size: 9A (230V Version)

CERTIFICATIONS / QUALIFICATIONS / THERMAL
IP Rating: IP20, dry location
Maximum Temperature (Ambient): 104°F (40°C)
Exterior Surface Temperature: 122°F (50°C)
CE / cETLus

WHAT'S INCLUDED:
Flight Case
14AWG Locking Power Cable
Snow Canon
10-Meter Long Hose

COMPATIBLE FLUID
Recommended Fluid: Atmosity Premium Snow Fluid. APS-1LC (Concentrate = 20L) , APS-4LC (Conentrate = 80L), APS-10LC (Concentrate = 200L), APS-4L, APS-20L

OPTIONAL ACCESSORIES:
MagFLY Card
MagAPP Card
MagRF Card
PSCM Hose-10M (PSC100)
PM-DMX1

©11-29-2022 MAGMATIC EFFECTS

CRISP MAX

SPECIFICATIONS / TECHNICAL DATA

REV A

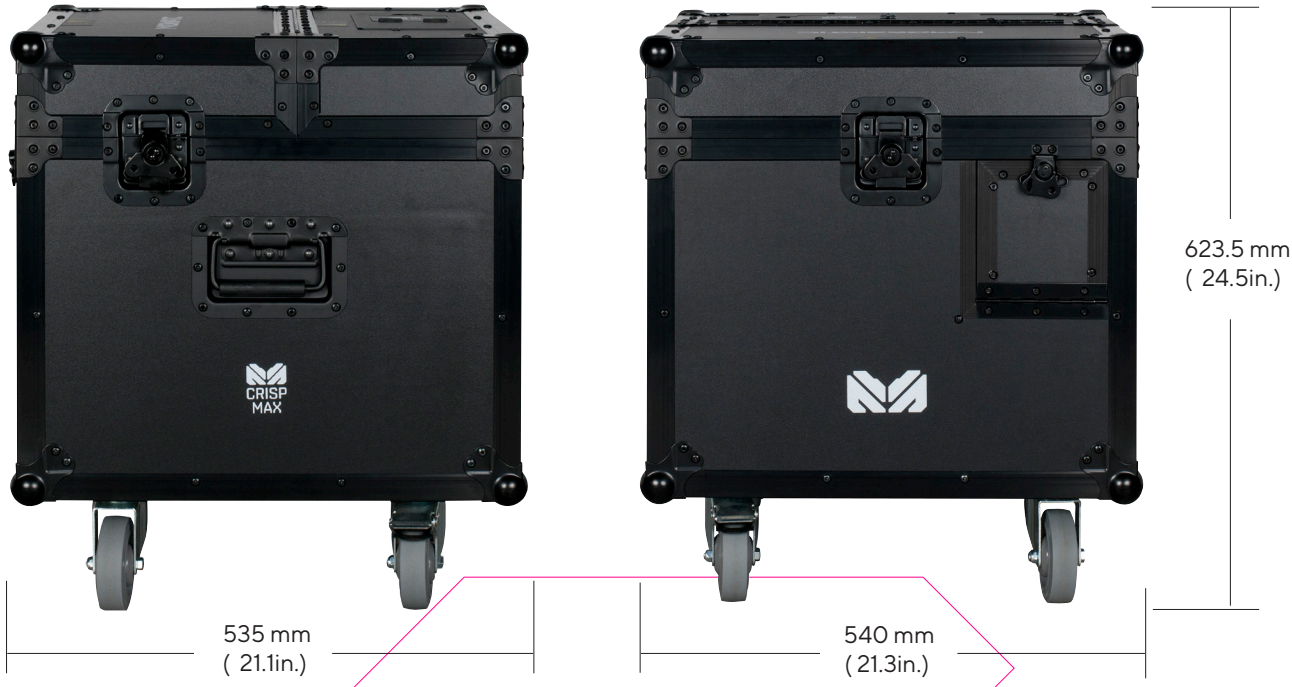

©11-29-2022 MAGMATIC EFFECTS